


Accessories



Remote control FFB-HT-1500

- powerful, tough and reliable industrial remote control with electrical and mechanical safety appliances for middle-sized distances (range: approx. 1.500 m at free sight possible)
- functions: pumping SUSPENSION / flushing WATER, pumping CIRCULATION, pump OFF, rotary knob for flow rate (infinitely variable), EMERGENCY STOP (further functions on request!)
- single transmission path, high and strong transmitter power
- standard features: sender, receiver, connecting cable 10 m, 3 rechargeable batteries, 1 battery-adapter for mignon-batterys, battery charger (12-24 V or 230 V), neck belt

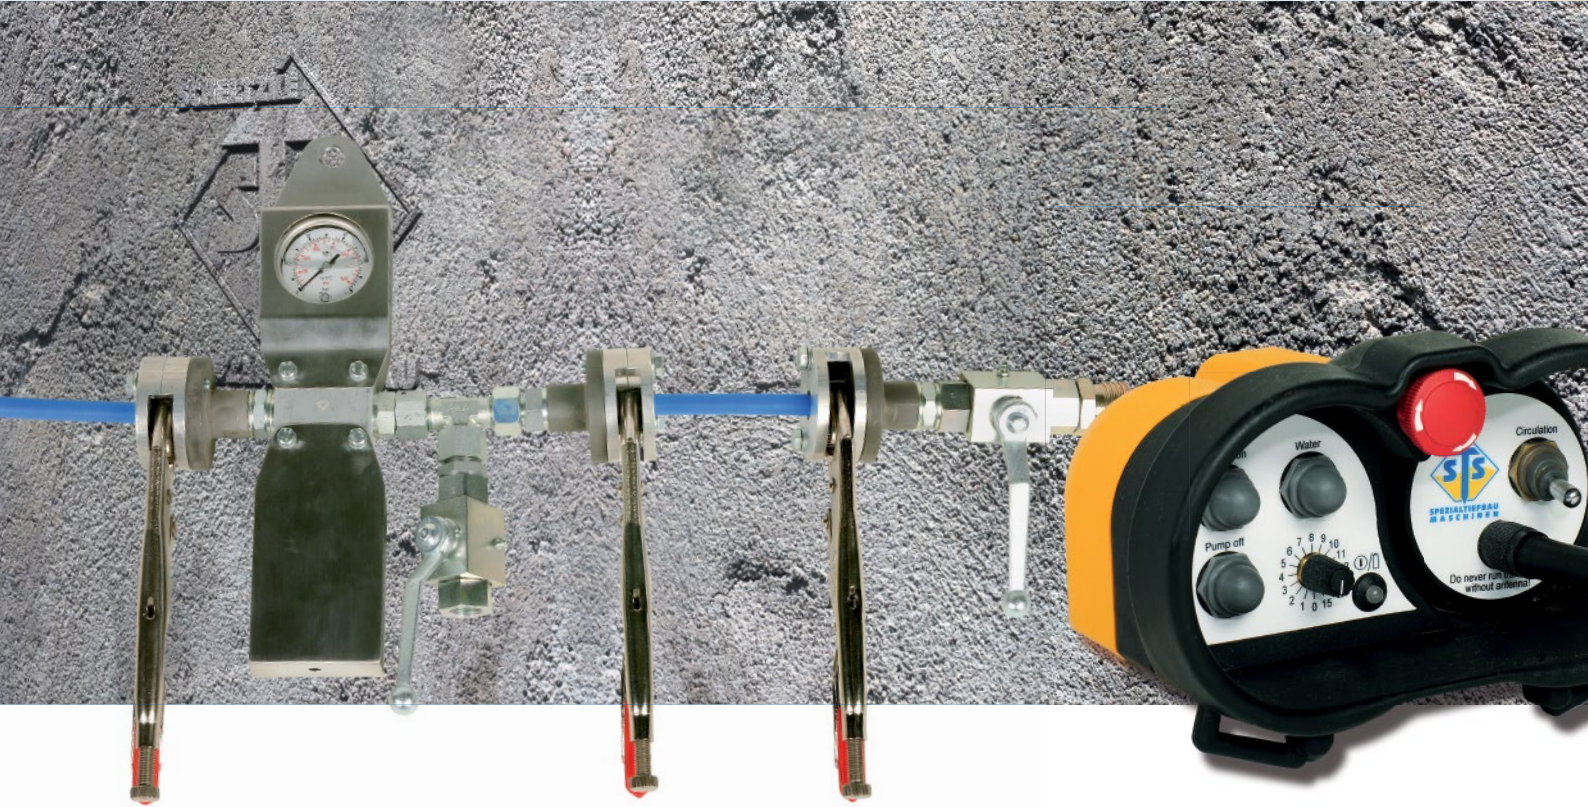

Remote control FFB-GF-3000

- powerful, tough and reliable industrial remote control with electrical and mechanical safety appliances for high distances (range: approx. 3.000 m at free sight possible)
- functions: pumping SUSPENSION / flushing WATER, pumping CIRCULATION, pump OFF, rotary knob for flow rate (infinitely variable), EMERGENCY STOP (further functions on request!)
- bi-directional transmission path, high and strong transmitter power
- standard features: sender, receiver, connecting cable 10 m, 3 rechargeable battery, 1 rechargeable battery with 12V connecting cable, battery charger (12-24 V or 230 V), neck and pelvic belt



Accessories




Radio-data-transmission DFA-GF-3000

- wireless data transmission of pressure, flow, depth, further drilling parameters and machine functions
- range: approx. 3.000 m (at free sight possible)
- bi-directional transmission path, high and strong transmitter power
- standard features: sender, receiver, connecting cables



Cable remote control KFB

- with 15 m cable in a safety casing with hang up hook
- with following functions: pumping SUSPENSION / flushing WATER, pumping CIRCULATION, pump OFF, rotary knob for flow rate (infinitely variable), EMERGENCY STOP (further functions on request!)

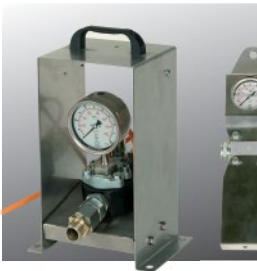

Pressure transmitter DA

- for pressure measuring directly at injection place
- in a compact housing made of stainless steel
- optional with manometer and/or pressure sensor up to 600 bar [8.702 psi]
- different achievements on request!




Cable reel KT-FB

- with 100 m cable as connection of cable remote control (KFB) or remote control (FFB) to the pump and mixing plant

Cable reel KT-DA

- with 100 m cable as connection of pressure transmitter (DA) directly at injection place to the pump

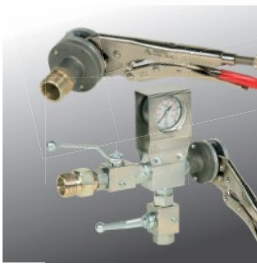

Grouting grippers

- as a quick clamp connection of grouting hoses for injections directly at injection place
- for PU grouting hoses with external diameter of 13 up to 21 mm
- achievements: with delivery pressure manometer, electr. Pressure sensor, blocking and pressure dumping ball valves, fittings
- different achievements on request!



Grouting hoses

- max. rated pressure: up to 600 bar [8.702 psi]
- internal diameters: DN 15 up to DN 40
- hose length: up to 25 m

Further devices, special equipments and accessories on request!

(Status April 2013 / technical changes reserved)

STS Scheltzke GmbH & Co. KG . Diamantstrasse 14 . D-65468 Trebur
Tel.: 0049 6147 - 501740 . Fax: 0049 6147 - 501741 . info@scheltzke.de