

# High-Pressure-Pump-Unit


## HPS 110-E-B



### Technical Data

Drive	Electro-hydraulic
Drive Power	55,0 kW
Total Power Consumption	approx. 56,0 kW
Connections	
Electrical	CEE 125 A / 400 V AC, 50 Hz, IP 54
In-/Outlets	
Suction line	DN 65 - RD 105
Pressure line	G 1 ½ BSPP IG DN 40 - 38 S
Circulation line	G 1 BSPP IG DN 25 - RD 38
Dimensions (L x W x H)	2.430 x 860 x 2.180 (mm)
Weight	approx. 2.700 kg
Application	Pumping of cement-, fly ash and bentonite suspensions at anchoring, groutings, flushings, sealings, piling and vibrating jobs, slim and diaphragm walls, soil mixing WSM (single-, twin-, triple-mix) and cutter soil mixing CSM

Performance Delivery Pump	
Pressure	max. 245 bar <sup>1)</sup> [max. 3.553 psi <sup>1)</sup>
Flow rate	max. 245 l/min. <sup>1)</sup> [max. 65 gal U.S.] <sup>1)</sup>

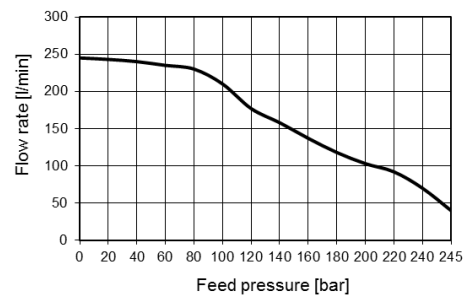

# High-Pressure-Pump-Unit HPS 110-E-B



## Standard Features

### Framework

skid steel frame, partially enclosed and with partition panel, floor and oil pan, four towing devices, lashing eyes for transportation, fork lift guides crosswise, machine room sound proofed, lockable and fixable doors, finishing 2K-paint RAL 7042 (traffic grey) or on customer desire unicoloured

### Electric Drive

electric motor 55,0 kW, 1.500 rpm, 400 V AC, 50 Hz, IP 54, automatic phase correction, motor safety switch, control voltage 24 V DC (for valves and remote control), operating hour meter

### Hydraulic

oil tank volume 350 l [92 gal U.S.], axial piston pump and gear pumps, oil cooler with thermostat, main and control oil filter, oil filling and ventilation filter, electrical oil filter pollution control, oil level and temperature indicator, manometer for hydraulic and control oil pressure, pressure and flow infinitely variable

### Delivery Pump

vertical two-plunger pump  $\varnothing$  110 mm, flow rate per double stroke  $V = 5,3$  l [1,4 gal U.S.], pump valves (suction and pressure side) self-acting (disc valves), circulation and pump-down valves manually actuated, flow rate adjustment electro-proportional, automatic grease system for plunger sealing sleeves, plunger oil tank

### Delivery Pressure Measurement

manometer 0-250 bar [3.626 psi]  $\varnothing$  100 mm completely with stainless steel membrane, electronic pressure sensor 0-250 bar [3.626 psi], 4-20 mA, G  $\frac{1}{2}$  BSPP AG with LCD display on switch cabinet

### Operating Devices

main switch, control lights CURRENT POWER, CONTROL VOLTAGE and OIL COOLER OPERATION, warning lights OIL FILTER PUMP, OIL FILTER CONTROL OIL and OIL COOLER MALFUNCTION, LED lamps for plunger positions, buttons HYDRAULIC MOTOR ON/OPERATION and HYDRAULIC MOTOR OFF/MALFUNCTION, button EMERGENCY-STOP, buttons PUMP ON and PUMP OFF, button ACKNOWLEDGE LOW OIL LEVEL, switch REMOTE CONTROL ON/OFF, switch LIGHT ON/OFF for LED rod lamp inside, rotary knob for max. DELIVERY PRESSURE adjustment, potentiometer FLOW RATE, flow rate counters l/min. [gal U.S./min.] and l/total [gal U.S./total] with zero-setting (2x), auto pre-select counter for flow rate l/total [gal U.S./total], LCD display for delivery pressure, **Connection Options:** socket REMOTE CONTROL with EMERGENCY-STOP bridge plug, free socket 400 V / 16 A, free socket 230 V / 16 A

### Accessories (included)

documentation, special tools for operation and maintenance, cable remote control 15 m and cable reel 100 m, suction hose 3 m, circulation hose, corded LED rod lamp inside

### Accessories (optional)

spare part kits, grouting hoses, suction hoses, fittings

### Supplementary Devices

mixing and storing tanks for solid suspensions, dosing devices, screw-conveyors, radio remote control, control devices, electronic data acquisition and recording, regulating and measuring systems RMS with computer evaluation per USB and injection journal, flow meter with delivery pressure measuring, electronic delivery pressure devices (pressure transmitter) at injection place, devices for radio data transmission

*Further devices, special equipments and accessories on request!*