


Mix- and Storing-Unit fully-automatic

MRS 700-D-A-AUT

with diesel engine JCB 55kW (EU 3b / Tier 4f)

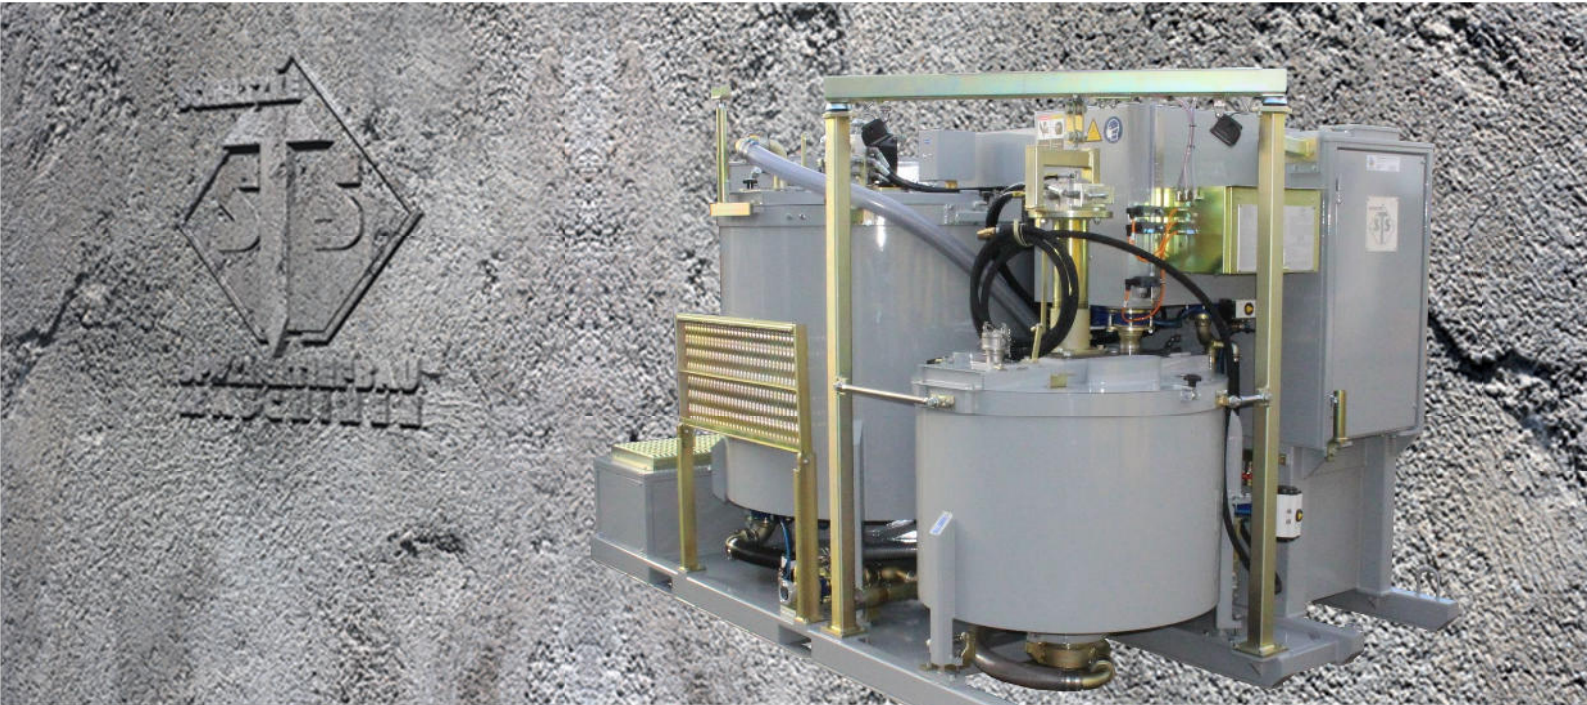

Technical Data

Drive	Diesel-hydraulic
Drive Power	Diesel engine JCB 444 TCAE, 55 kW [75 HP] at 2.200 rpm, max. Torque 375 Nm at 1.400 rpm, speed limit at 1.800 rpm, 4-cylinder in-line with turbo charger, 4,4 l displacement, water and intercooled, electrical injection
Exhaust emission	EU Step 3b / U.S. EPA Tier 4 final
Fuel consumption	+/- 14 l Diesel/h. [3,7 gal U.S.]
Fuel tank	made of steel, approx. 150 l volume [39 gal U.S.]
Connections	
Electrical	12 V / 24 V DC
Hydraulic	quick couplings for two screw-conveyors quick couplings for external storing tank
Water inlet	G 2 BSPP AG DN 50 - C-coupling G 1 BSPP IG DN 25 - GEKA
Dimensions (L x W x H)	3.800 x 2.250 x 2.250 (mm)
Weight	approx. 4.600 kg
Application	Fully automatic mixing and pumping of cement-, micro-cement, fly ash and bentonite suspensions at anchorings, injections, fillings, flushings, groutings, piling and vibrating jobs, slurry walls, Soil-Mixing WSM and Cutter-Soil-Mixing CSM
Performance	
Mixer with weighing system	Hand feed up to 12,0 m ³ /h Feed per screw-conveyor up to 17,5 m ³ /h
Volume Mixing Tank	volume 700 l [185 gal U.S.] / effective volume 600 l [159 gal U.S.]
Volume Storing Tank	volume 1.500 l [396 gal U.S.] / effective volume 1.400 l [369 gal U.S.]

Mix- and Storing-Unit fully-automatic

MRS 700-D-A-AUT

with diesel engine JCB 55kW (EU 3b / Tier 4f)



Standard Features

Framework

skid steel frame, partially enclosed and with partition panel, floor and oil pan, central towing device, lashing points for truck load securing, fork lift guides crosswise, machine room sound proofed, lockable doors, finishing 2K-paint RAL 5005 (signal blue) or on customer desire unicoloured

Diesel Drive

Diesel engine JCB 444 TCAE, 55 kW [75 HP] at 2.200 rpm, 4-cylinder in-line, turbo charger, water and inter cooled, max. torque 375 Nm at 1.400 rpm, speed limit at 1.800 rpm (infinitely variable speed adjustment), starter battery 12 V, exhaust silencer approx. 30 dB/A, control voltage 24 V DC (for valves and remote control), operating hour meter

Hydraulic

oil tank volume 170 l [45 gal U.S.], gear pumps, oil cooler with thermostat, main oil filter, oil filling and ventilation filter, electrical oil filter pollution control, oil level and temperature indicator, manometer for hydraulic pressure (mixer and agitator)

Water tank with Water Dosage

made of stainless steel (brushed), water storing and dosing tank V = 380 l [100 gal U.S.], fixed overflow pipe, water connection C-coupling with flushing connection and butterfly valve DN 50 pneumatically controlled, water tank inlet valve DN 50 and water tank outlet valve DN 100 pneumatically controlled, fully-automatic water metering with fluid level indicator

Mixing Tank (Colloid Mixer) with Weighing

made of stainless steel (brushed), round tank with conical floor, volume 700 l [185 gal U.S.], effective volume 650 l [171 gal U.S.], mixer drive hydraulic motor (rotation speed infinitely variable), two tank covers, each hinged and lockable with screw conveyor inlets and safety end switches, cover for screw conveyor inlet with inspection flap, hopper with bag ripper, circulation and pump down valves DN 80 pneumatically controlled, transport locking screws

Tools in Mixing Tank

3 fast turning mixing tools on one common drive shaft with pump down function, 2 mixing blades Ø 250 mm, 1 pumping wheel Ø 210 mm, drive shaft bearing above mixer fluid level (No stuffing box, so dry running possible w/o any problems!)

Storing Tank with Fluid Level Control

made of stainless steel (brushed), round tank with straight floor, volume 1.500 l [396 gal U.S.], effective volume 1.400 l [369 gal U.S.], agitator drive hydraulic motor (rotation speed infinitely variable), foldable and lockable tank covers with safety end switches and inspection flap, suspension inlet DN 65 with inlet basket, suspension outlet DN 80 with pneumatically controlled valve and suction basket, cleaning cover sidewise, slowly turning agitator with a floor scraper and stream screen, fluid level control per ultrasonic sensor, hydraulic connections for external storing tank, safety folding grate

Operating Elements

battery main switch, control lights CONTROL VOLTAGE and OIL COOLER OPERATION, button EMERGENCY-STOP, switch REMOTE CONTROL ON/OFF, buttons HIGH PRESSURE CLEANER ON and HIGH PRESSURE CLEANER OFF, switch DRAINING SUSP./WATER / ALL VALVES, switch LIGHT ON/OFF for inside rod lamp and switch LIGHT ON/OFF for outside working lamps, rotary knob for max. DELIVERY PRESSURE adjustment, valve for shutting/adjusting the mixer speed, valve for shutting/adjusting the agitator speed, **Connection Options:** socket REMOTE CONTROL 14-pin with EMERGENCY-STOP bridge plug, socket EXTENSION REMOTE CONTROL, socket 24 V SCREW CONVEYOR 1 and 2, sockets 12 V VIBRATOR 1 and 2, sockets ULTRASONIC SENSOR and MIXTURE MONITORING, socket CHARGER 12V, socket ETHERNET

Engine Panel

LCD 7" colour display with lateral function keys for displaying and querying all relevant engine information such as engine speed, fuel consumption, fuel tank display, water temperature, oil and boost pressure, battery voltage, operating hours, date/time etc., ignition lock, warning lamps for LOW COOLING WATER and AIR FILTER POLLUTION, switch for RPM SETTING 0-1-2

Control Panel with Touch-Screen

warning lights WARNING and FAULT, button ACCEPT, button EMERGENCY-STOP, buttons FILL WATER TANK and EMPTY WATER TANK, buttons MIXER CIRCULATION and EMPTY MIXER, buttons MIXER/AGITATOR ON/OFF and SCREW CONVEYOR ON/OFF, button START MIXTURE, buttons PUMP OFF, SUSPENSION and WATER, switches RECEPT -/+ and COMPONENTS -/+, socket USB, potentiometers FLOW RATE and MIXING TIME

Touch-Screen for visualization of the operating parameters for the production of mixtures, as well as pumping of the suspension to the consumer. The following parameters are displayed and can be called up: Display of the current flow rate and the current delivery pressure, preselection counter flow rate target/actual, batch and preselection counter mixtures target/actual, current filling level of the mixing and storage tank, input of several recipes, display of error messages, display in different languages and much more.

Automatic Mode: production of the mixtures automatically or in manual mode, infinitely variable setting of the mixing time, automatic pumping in circulation and pump-off, automatic control of the screw conveyor, all shut-off flaps are pneumatically controlled

Accessories (included)

documentation, special tools for operation and maintenance, cable remote control 15 m and cable reel 100 m, circulation hose, high pressure cleaner 4,0 kW, 950 rpm, 200 bar [3.045 psi] (industrial device, fixed installed) with water inlet filter, air compressor (industrial device, fixed installed), corded LED rod lamp inside, LED work lamps for mixing and storing tank outside

Further devices, special equipments and accessories on request!